

PRODUCT PARAMETERS

NO.PS-500T1




Specifications

opodinoutions	
Design air volume	35cfm/60m ³ /h
Applicable area	20-30㎡
Shell material	Aluminum alloy
Weight	1kg
Noise	≤50dB
Extreme operating temperate	ure +60°C, -20°C
Electrical	
Voltage	DC 12V
Power consumption	10W
Internal fuseOverload Safety Protection	
Design and Dual Protection of Power Supply	
Ionic valve	
MaterialN	Multiple composite,
stainless steel outer net	
Quantity	One
size80mm	(3 inch standard)
Ion tube life	2 years
size	See Figure 2

Application analysis

Plasma air purifier is applicable to places where buses, motor cars, buses and long-distance buses are prone to generate peculiar smell and bacteria. The equipment will be debugged and used as recommended by Edda Air engineers.

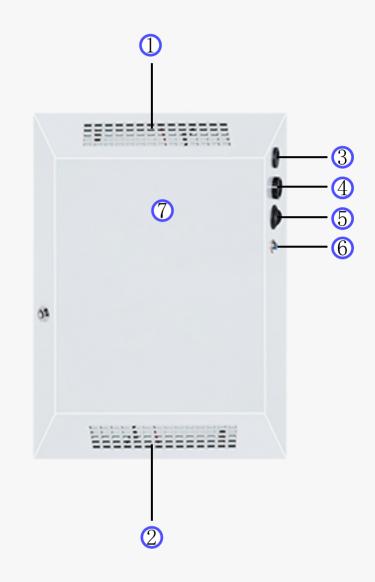

- 1) air intake
- 4 Fuse
- 2 Outlet
- 5 Power switch
- 3 power plug
- 6 Work indicator
- 7 Primary filter screen

(clean once every 3-6 months)

