

Model: PS-501TY



Specification

Design air volume—speed regulation 0-850m³/h
 Applicable area—50-150m²
 Working noise ≤50db
 Material—Sheet metal
 Weight—15.5kg
 Extreme working temperature — +60° C, -20° C

Electric

Voltage—AC 220V
 Frequency—50/60Hz
 Power consumption—70W
 Internal fuse - overload protection design and dual protection of power supply

Ion tube

Material—Multiple composite, stainless steel
 external network
 Quantity—2
 Size—520mm (20-inch standard)
 Ion tube life—More than 20,000 hours
 Dimensions—See Figure 2

Certification

CE certification, CMA certification, CNAS certification

Application analysis

Edda Air Plasma Purifier is suitable for use in hospitals, nursing homes, pet hospitals, public places, restrooms, places where odor or bacteria are easily produced. The equipment will be commissioned according to the recommendations of the Edda Air engineer.

Optional accessories

Time control switch / primary filter / medium efficiency filter

Figure 1

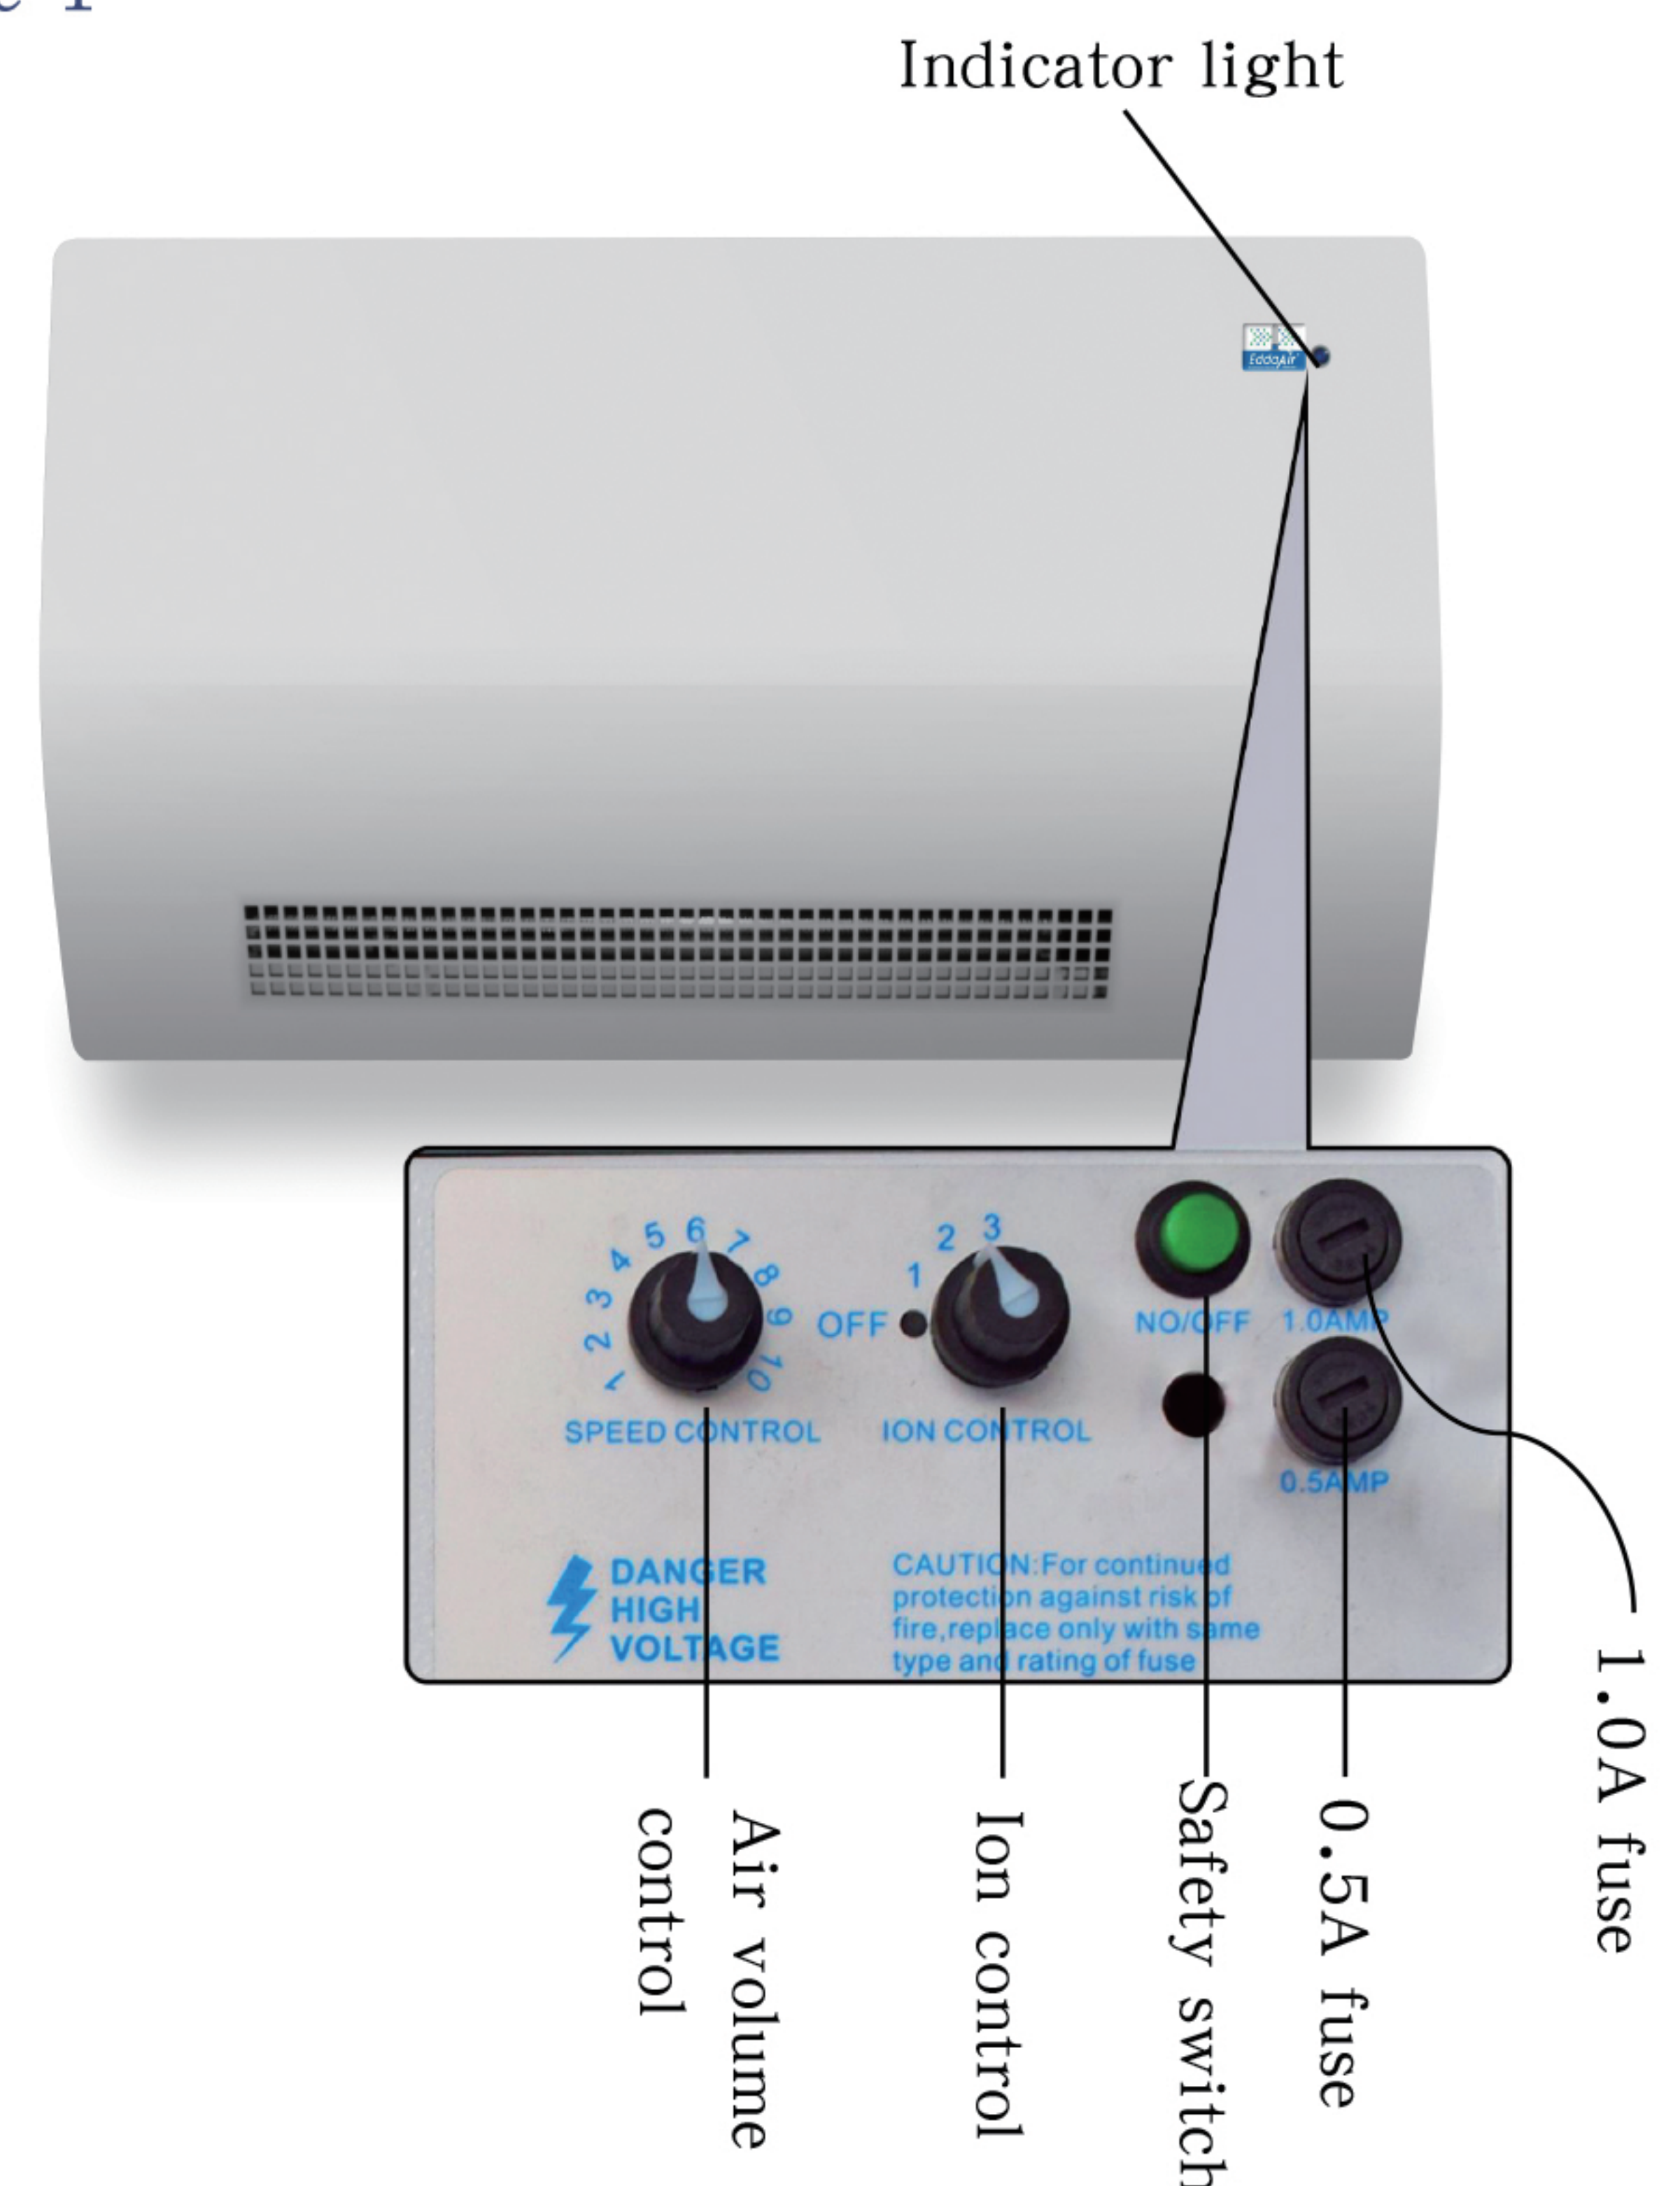


Figure 2

